


Swinging Trapeze Tech

We supply:

- Crane bar
- Guy wires and ratchet straps
- Trapeze
- Acrobat safety lines and belt
- Lunge holder

We require:

- We require three upper points, (beam clamp or wrappable beam) rated to hold 2000 lbs (1T)
- 4 ground anchors rated at 1T each. Floor anchors to be approx 20' in front and behind from crane bar to ensure guy wires are at 45° (see diagram)
- 1 ground anchor or pinrail rated to hold 10kN of force for safety line

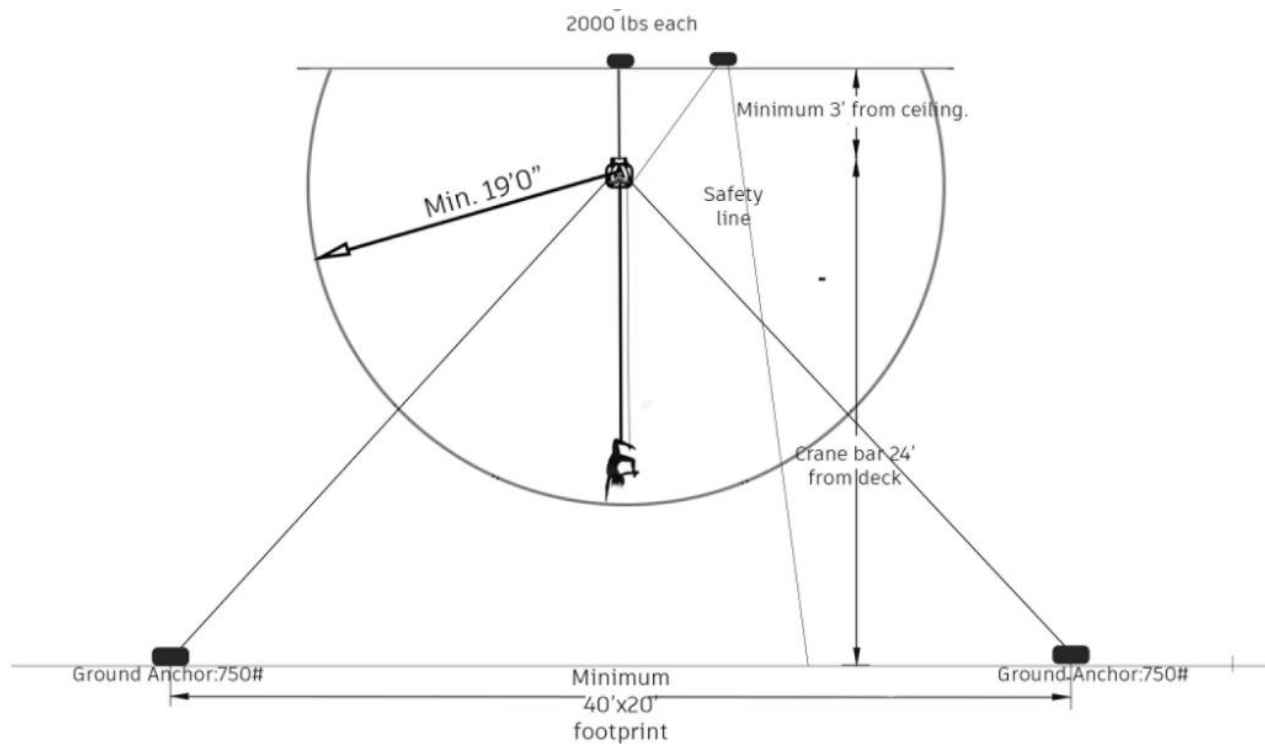

Minimum Height stage to grid: 27'

Crane to ceiling minimum clearance: 3'

Crane to floor minimum height: 24'

Crane Bar Length: 6'

Footprint SL to SR: 40'

Footprint US to DS: 22'

Lighting: Multi-directional lighting with no single